




LED Ceiling Bulkhead




Product Spec:

Product Code	Dimension D*H[mm]	Power [W]	Input Voltage [V]	Efficiency [lm/W]	Color Temp[K]	CRI	Beam Angle	IP	LED Chip
ALCBR19017-10W	Φ 204*82mm	10W	AC200-240V	80-100lm/W	3000K-6000K	≥ 80	120°	IP65	SMD2835
ALCBR19017-18W	Φ 285*86mm	18W	AC200-240V	80-100lm/W	3000K-6000K	≥ 80	120°	IP65	SMD2835
ALCBR19017-24W	Φ 285*86mm	24W	AC200-240V	80-100lm/W	3000K-6000K	≥ 80	120°	IP65	SMD2835

Dimension(mm)




Luminous Intensity Distribution:

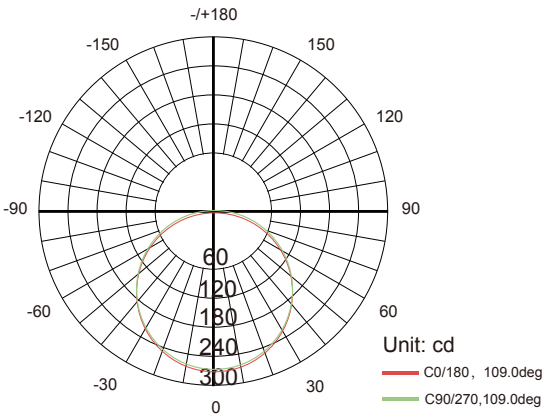

AVERAGE BEAM ANGLE(50%):109.0 DEG

Instruction Manual

Warning: Turn off power before installation

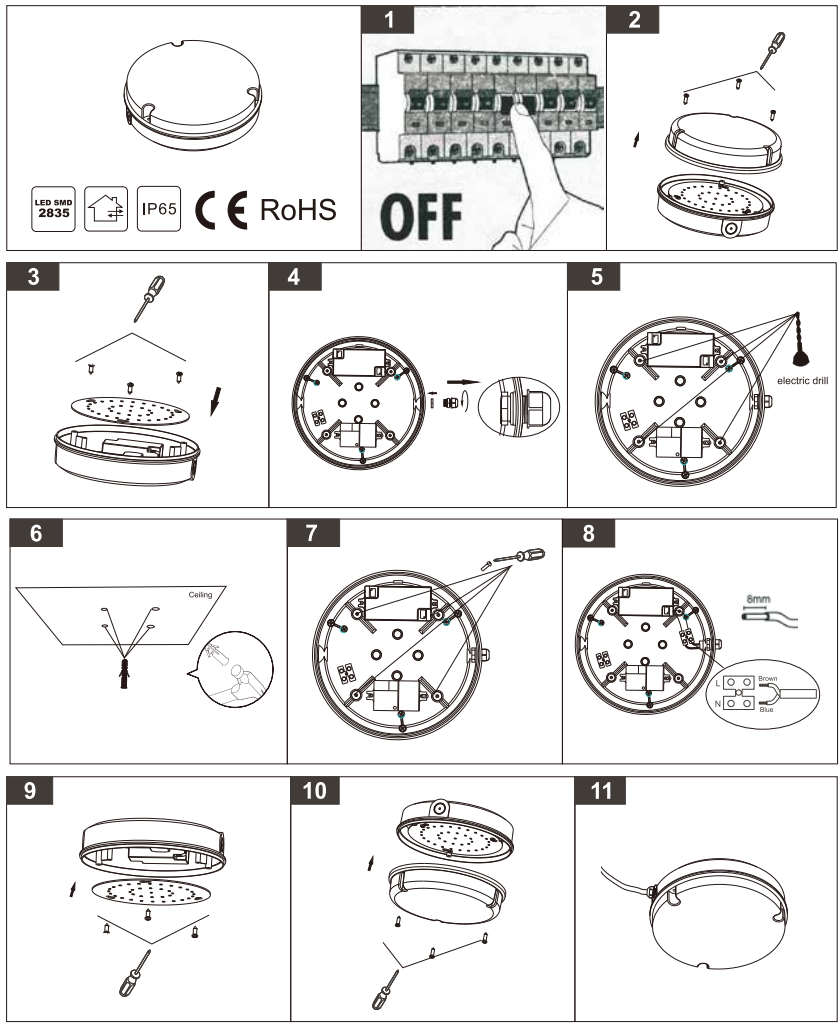

The installation manual consists of 11 numbered steps:

- Step 1:** Shows the fixture with a terminal block. A hand is shown turning a switch to the 'OFF' position.
- Step 2:** Shows the back cover being removed from the fixture.
- Step 3:** Shows the internal LED array being inserted into the back cover.
- Step 4:** Shows the back cover being secured with screws.
- Step 5:** Shows the fixture being mounted to a ceiling using an electric drill.
- Step 6:** Shows the fixture being secured to the ceiling with screws.
- Step 7:** Shows the electrical wiring being connected to the terminal block.
- Step 8:** Shows the wiring connections, including a note for an 8mm hole and a color-coded terminal block (Brown, Blue, N, L).
- Step 9:** Shows the front cover being attached to the fixture.
- Step 10:** Shows the front cover being secured with screws.
- Step 11:** Shows the final assembled fixture.

Additional icons in the first step include: LED SMD 2835, IP65, CE, and RoHS.