

LED Slim Panel 19<UGR<23




- **PMMA 3mm LGP**
- **TPB/TPA**
- **NO Stroboscopic**
- **5Years warranty**
- **19<UGR<23**



Product Code	Dimension L*W*H [mm]	Power [W]	Input Voltage [V]	Efficiency [lm/W]	Color Temp[K]	CRI	Beam Angle	UGR	LED Chip
ALP6060-S24-30WK2	595*595*11mm	30W	AC100-240V	100-125lm/W	3000K-6000K	≥80	120°	19<UGR<23	SMD2835
ALP6060-S24-36WK2	595*595*11mm	36W	AC100-240V	100-125lm/W	3000K-6000K	≥80	120°	19<UGR<23	SMD2835
ALP6060-S24-48WK2	595*595*11mm	48W	AC100-240V	100-125lm/W	3000K-6000K	≥80	120°	19<UGR<23	SMD2835
ALP6262-S24-30WK2	620*620*11mm	30W	AC100-240V	100-125lm/W	3000K-6000K	≥80	120°	19<UGR<23	SMD2835
ALP6262-S24-36WK2	620*620*11mm	36W	AC100-240V	100-125lm/W	3000K-6000K	≥80	120°	19<UGR<23	SMD2835
ALP6262-S24-48WK2	620*620*11mm	48W	AC100-240V	100-125lm/W	3000K-6000K	≥80	120°	19<UGR<23	SMD2835
ALP12030-S24-36WK1	1195*295*11mm	36W	AC100-240V	100-120lm/W	3000K-6000K	≥80	120°	19<UGR<23	SMD2835
ALP12030-S24-36WK2	1195*295*11mm	72W	AC100-240V	100-120lm/W	3000K-6000K	≥80	120°	19<UGR<23	SMD2835
ALP12060-S24-72WK2	1195*595*11mm	72W	AC100-240V	100-120lm/W	3000K-6000K	≥80	120°	19<UGR<23	SMD2835



■ **Dimension(mm):**

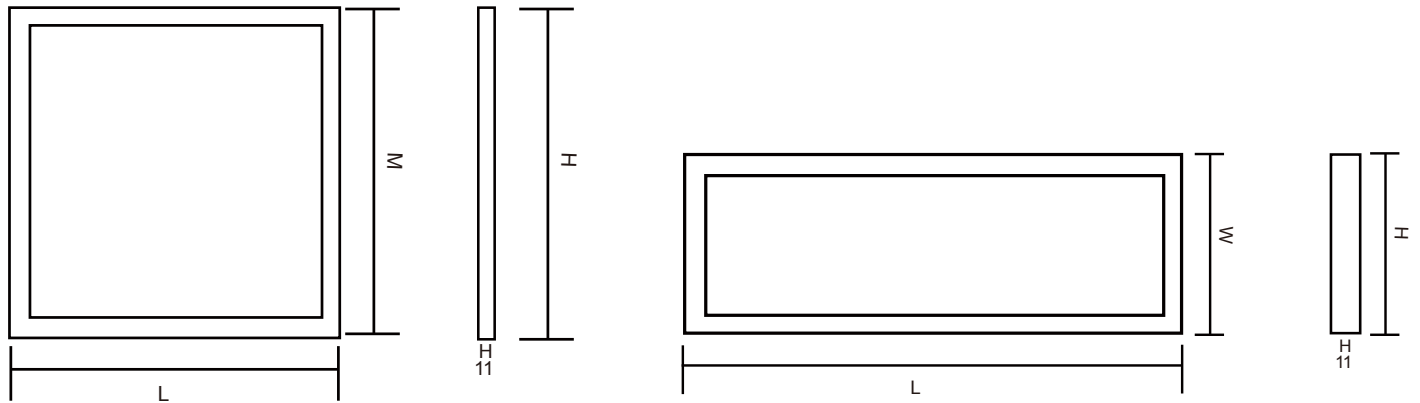

■ **Luminaire Photometric Test Report:**

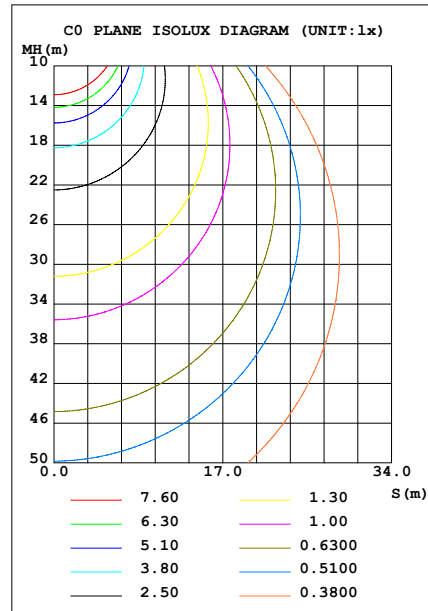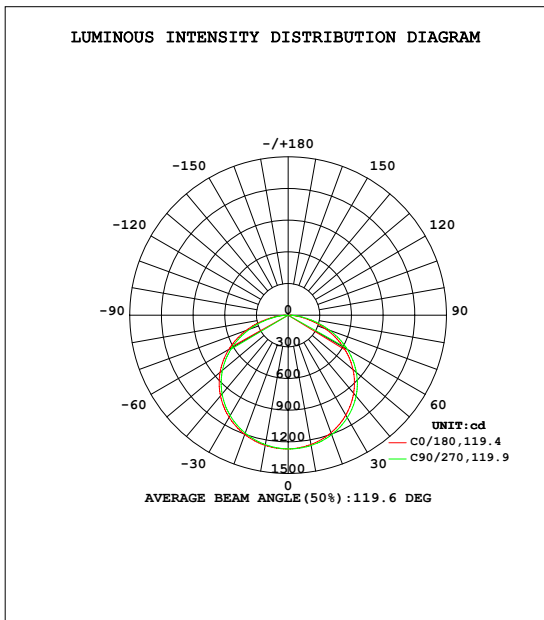

■ **Parts for Installation:**



Suspended



Spring kits



Connector(wall-mounted)



“Z”Shaped wall-mounted



“L”Shaped wall-mounted



Gypsum board mounted frame




Simple gypsum board mounted frame



Push-in surface mounted frame



Twist lock connector

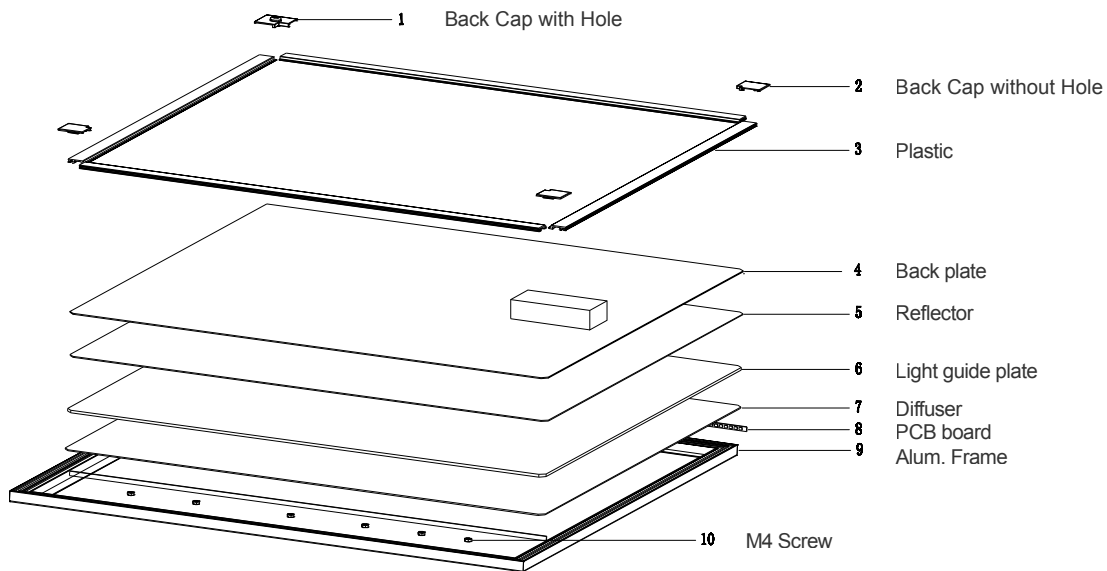Explosion map:

Packing Details:
